

10/516990

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
18 November 2004 (18.11.2004)

PCT

(10) International Publication Number
WO 2004/098884 A1

(51) International Patent Classification⁷: B32B 31/00, 15/08, 15/20, 3/12

(81) Designated States (*national*): AE, AG, AL, AM, AU, AZ, BA, BB, BR, BY, BZ, CA, CN, CO, CR, CU, DM, DZ, EC, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, RO, RU, SC, SD, SG, SL, TJ, TM, TN, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:

PCT/KR2003/001618

(22) International Filing Date: 12 August 2003 (12.08.2003)

(25) Filing Language:

English

(84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(26) Publication Language:

English

Published:


— with international search report

(71) Applicant and

(72) Inventor: KIM, Byung-Shik [KR/KR]; 129-904, Park town, 55, Soonae-dong, Bundang-gu, Seongnam-Si, Gyeong gi-do 463-728 (KR).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CONTINUOUS MANUFACTURING SYSTEM FOR COMPOSITE ALUMINUM PANELS

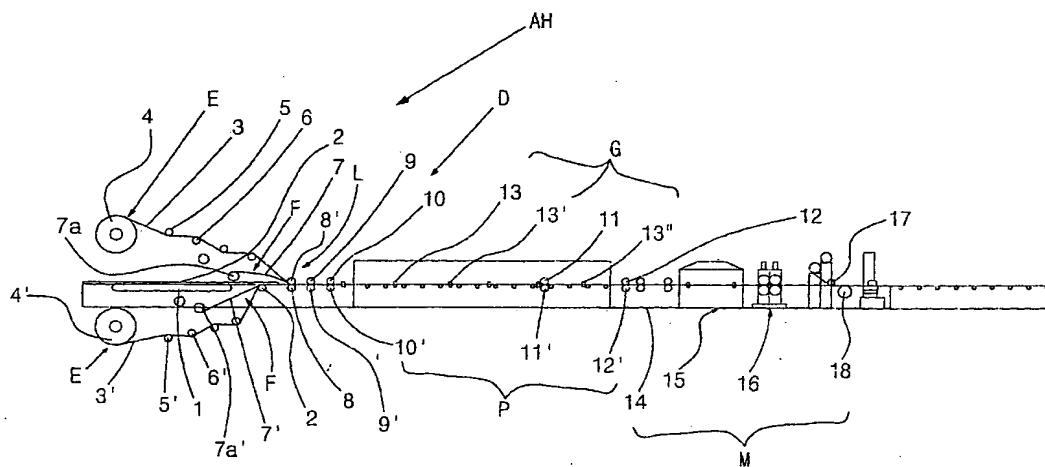

WO 2004/098884 A1

(57) Abstract: A continuous manufacturing system for composite aluminum panels comprises a continuous expanding device (CE) for expanding a raw material of a core and a main body (AH) of a continuous manufacturing system of composite aluminum panels. The continuous expanding device (CE) consists of a cramp (21) for holding raw material (2a), a raw material supplier (S), a number of sliding rods (31) for sliding raw material (2a) and the core (2), subsidiary cramp (22) that reciprocates from side to side and is ascended and descended on racks (37, 37'), a cramp (23) for expanding a raw material and a roller (25) running idle transferring to the main body (AH). The main body (AH) consists of supplying part (E) for providing top and bottom aluminum plates (3, 3'), a supplying part (F) for providing adhering materials, a combination part (L) comprising the upper and lower rollers (8, 8') and a hot pressing part (P) comprising rollers (10, 10', 11, 11', 12, 12') for hot pressing and supporting.